

# 15' PREDATOR

You're always ahead... with a Modern behind!


For more information or to locate a dealer call 1-888-404-8908




# MODERN AG PRODUCTS



Smooth underdecks make for more efficient mowing and less area for rust to begin. Deck rings are standard.

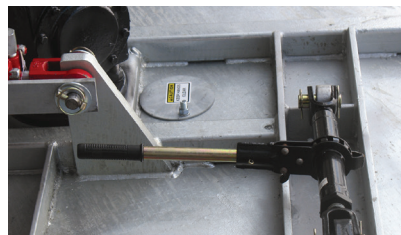

This unit is equipped with two 16,000 lb. leveling ratchet jacks.



255 hp transfer gear box with 210 hp center and wing gearboxes.



**HOT DIPPED  
GALVANIZED  
DECK &  
FRAME**



**NEW  
STYLE  
LEVELING  
TONGUE**



**RUBBER  
GUARD  
STANDARD**



**AIRCRAFT  
TIRES  
OPTIONAL**



**REAR  
CHAIN  
GUARD  
OPTIONAL**

**CUTTING  
WIDTH  
180"**

Deck Rings are standard on all 15' Predators and Super Predators.



## RED DOUBLE DIAMOND

Provides a 5 year limited warranty on gearbox and 10 year limited warranty on deck rust thru. (Super Predator, Predator & Super Highway Special series only)

\* Gearbox ratings based on field performance. \*\* The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.

## SPECIFICATIONS

Cutting Width . . . . . 180"

Transport Width . . . . . 90"

Overall Width . . . . . 187"

Overall Length . . . . . 180"

Cutting Height . . . . . 2"-15"

Blade Overlap . . . . . 6"

Wing Lift Hydraulics . . . . . Standard

Wing Flex . . . . . 90° Up/22° Down

Jackstand . . . . . Standard

Hitch . . . . . Swivel Clevis

Blade Carrier . . . . . Pan Stump  
Jumpers

Horsepower  
Required (min). . . . . 50 hp

Main Gearbox  
or Divider Box\* . . . . . 255 hp

Outboard Gearbox  
or Center & Wings\* . . . . . 210 hp

Output Shaft Diameter . . . 2-3/8"

Cut Capacity . . . . . 3-1/2"

Blade Tip Speed:

Main or Center 540 . . 15,268 fpm  
1000 . . 15,072 FPM

Wings 540 . . 14,821 fpm  
1000 . . 14,946 FPM

Driveline Size:

Main . . . . . Cat. 5 Constant  
Veloc.

Outboard Center  
or Wings . . . . . Cat. 4 w/Slip Clutch

Deck Thickness . . . . . 3/16"

Side Skirt . . . . . 1/4" x 10 1/4"

Replaceable Skid Shoes . . Standard

Front Safety Chains . . . . . Standard

Rear Safety Deflectors . . . Rubber Guard  
Standard with  
Chain Option

Weight (Approx). . . . . 5600 lbs.

Standard Tires . . . . . Laminated  
600 x 9

Dual Wingwheels . . . . . Option

Hydraulic Level Lift . . . . . Option

Deck Rings to Protect Deck . . . . . Standard