


# 10' PREDATOR

You're always ahead... with a Modern behind!

For more information or to locate a dealer call 1-888-404-8908



# MODERN AG PRODUCTS

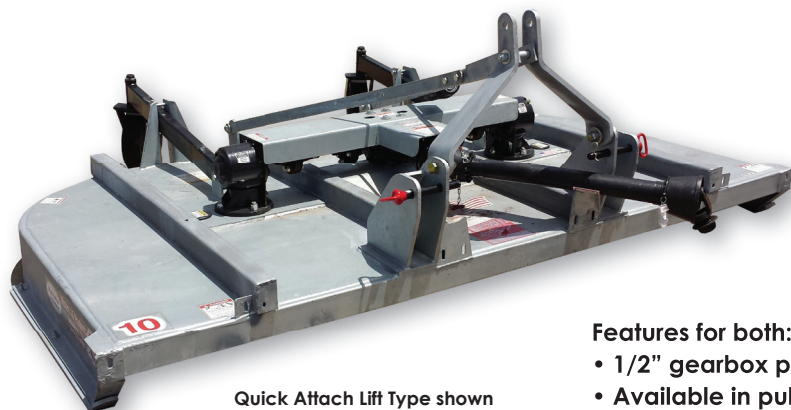

Quick Attach Lift Type shown  
Cat. 4 w/Clutch



## RED DOUBLE DIAMOND

Provides a 5 year limited warranty on gearbox and  
10 year limited warranty on deck rust thru.

[Super Predator, Predator & Super Highway Special series only]

THE 10' LIFT TYPE PREDATOR IS A CAT. 2  
HITCH WITH A 150 HP TRANSFER GEARBOX  
W/TWO 95 HP OUT BOARD GEARBOXES.



Smooth underdecks make for  
more efficient mowing and less  
area for rust to begin.

**HOT DIPPED  
GALVANIZED  
DECK &  
FRAME**

**RUBBER  
GUARD  
STANDARD**



**FRONT &  
REAR CHAIN  
GUARDS  
OPTIONAL**



**AIRCRAFT  
TIRES  
OPTIONAL**

### Features for both:

- 1/2" gearbox plate
- Available in pull type & quick attach lift
- 140 hp outboard gearbox option available
- Cylinder and hoses are standard on pull type

- Heavy duty stump jumpers & slip clutch protected
- Laminated tailwheels
- Quick Attach
- 3/4" A Frames - QA
- Cat. 2 Hitch Lift Type

**CUTTING  
WIDTH  
120"**



Aircraft Tires Available  
on Pull Type Only

Pull Type shown

Cat. 5 CV  
driveline

\* Gearbox ratings based on field performance. \*\* The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.

## SPECIFICATIONS

Cutting Width..... 120" Transport

Width..... 126"

Overall Width..... 126"

Overall Length..... 97"

Overall Height..... 2" - 15"

Blade Overlap..... 3"

Jackstand..... Standard

Hitch..... QA Cat. II or Clevis

Blade Carrier..... Pan Stump  
Jumpers

Horsepower Required (min):

Lift..... 60 hp

Pull..... 50 hp

Main Gearbox  
or Divider Box\* ..... 150 hp

Outboard Gearbox  
or Center & Wings\* ..... 95 hp

Output Shaft Diameter ... 2-3/8"

Cut Capacity..... 3"

Blade Tip Speed:

540 ..... 16,519 FPM

1000 ..... 15,491 FPM

Driveline Size:

Pull Type ..... Pull-Cat. 5 CV  
w/Slip Clutch

QA Lift Type ..... QA-Cat. 4  
w/Clutch

Deck Thickness..... 3/16"

Side Skirt ..... 1/4" x 8"

Front Safety Deflectors .. Chain Option

Rear Safety Deflectors:

Rubber Guard Standard with Chain  
Option

Weight (Approx) :

QA..... 2285 lbs.

Pull ..... 2670 lbs.

Standard Tires..... Laminated  
600 x 9

Dual Tailwheels (Pull Type) Option

Hydraulic Level Lift (Pull Type)Standard